

TATA HITACHI

Reliable solutions

TM06 *Super*

Built to Last




TRANSIT MIXER

Nominal Capacity : 6 m³
Waterline Capacity : 7153 ltrs.
Max. Drum Speed : 14 rpm


SPECIFICATIONS

TECHNICAL DATA		
Nominal capacity	litres	6000
Geometric volume	litres	12135
Filling ratio	%	49
Waterline volume	litres	7153
Drum inclination	deg	13.5
Engine		Air cooled KIRLOSKAR HA494
Power rating	kW/HP	51.4/70
Drum speed	rpm	14 (max)
Water tank	litres	470
Water pump		Belt driven / Gear box mounted
Weight of transit mixer*	kg	3705
Ladder		Left side
Chute		Swivel chute with movable bearing arm
Optional fitments		Anti jump device. Additional extension chute

*(approx., including dry engine wt., excluding water & concrete)

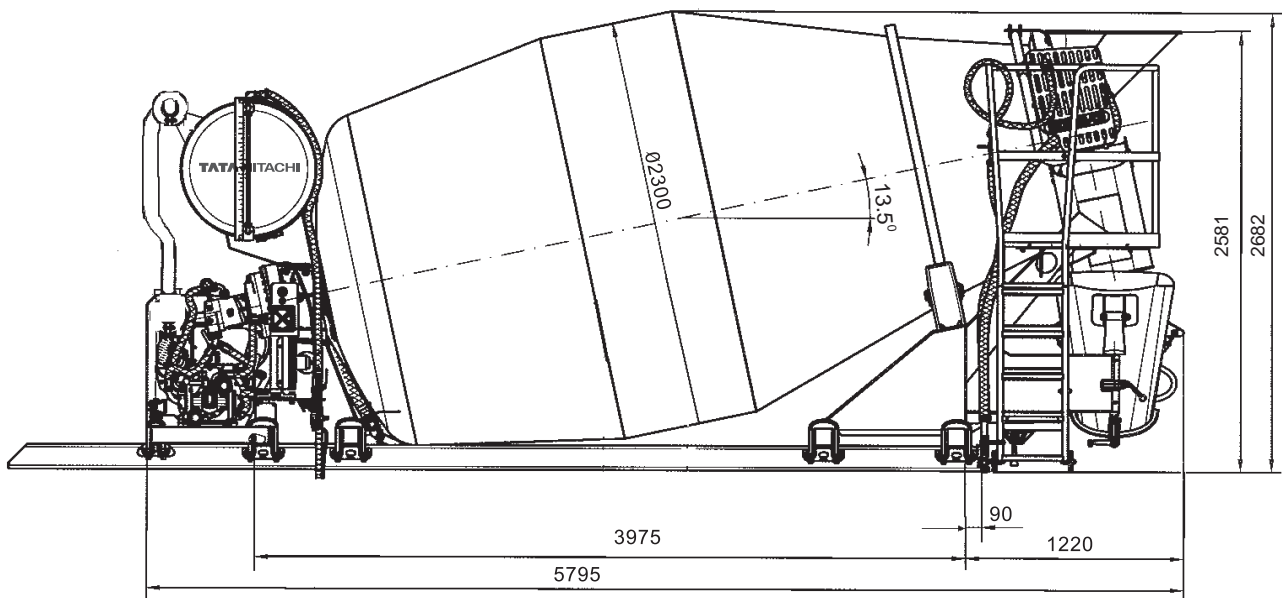

Long Drum Life



Superior wear resistance composition of the steel (Domex 600) ensures long drum and blade life.

Sturdy Frame



Integral box-structure design of subframe for high rigidity and strength.

Superior Features



Option of Anti-jump device to prevent flat spots on the rollers and drum bearing



Spring loaded mounting for lower vibration load on the chassis.

The Specifications are subject to change without prior notice. The Machine depicted may vary from the actual Machine Please contact our nearest office for latest specifications. Accessories shown here are not part of the standard equipment Performance of the machine may vary with site and operating conditions encountered

Tata Hitachi Construction Machinery Company Limited

Registered Office : Jubilee Building 45 Museum Road Bangalore 560 025 India
Telephone: +91 80 66953301 02 03 04 05 Fax: +91 80 66953309 25325792

Toll Free: 1800 3456 500



Authorised Dealer